

Fuse Base

DIN 43625 24kV/36kV



General characteristics

Fuse base for outdoor use with polymeric insulators.

- Suitable for fuses with dimensions according to DIN 43625
- Manufactured in compliance with IEC 60282-1
- Weight: 8,9 Kg (36 kV) 7,4 Kg (24 kV)

Construction specifications

- Hot-dip galvanized steel frame
- Polymeric insulators (consult alternative with porcelain insulators)
- Tin plated copper terminals
- Tin plated copper contacts, with pressure guaranteed by stainless steel springs




Electrical specifications

NOMINAL VOLTAGE (KV)	POWER-FREQUENCY WITHSTAND VOLTAGE (KV ef.)	LIGHTNING IMPULSE WITHSTAND VOLTAGE (KV cr.)
24	50	125
36	70	170

Rated current: 400 A

Dimensions

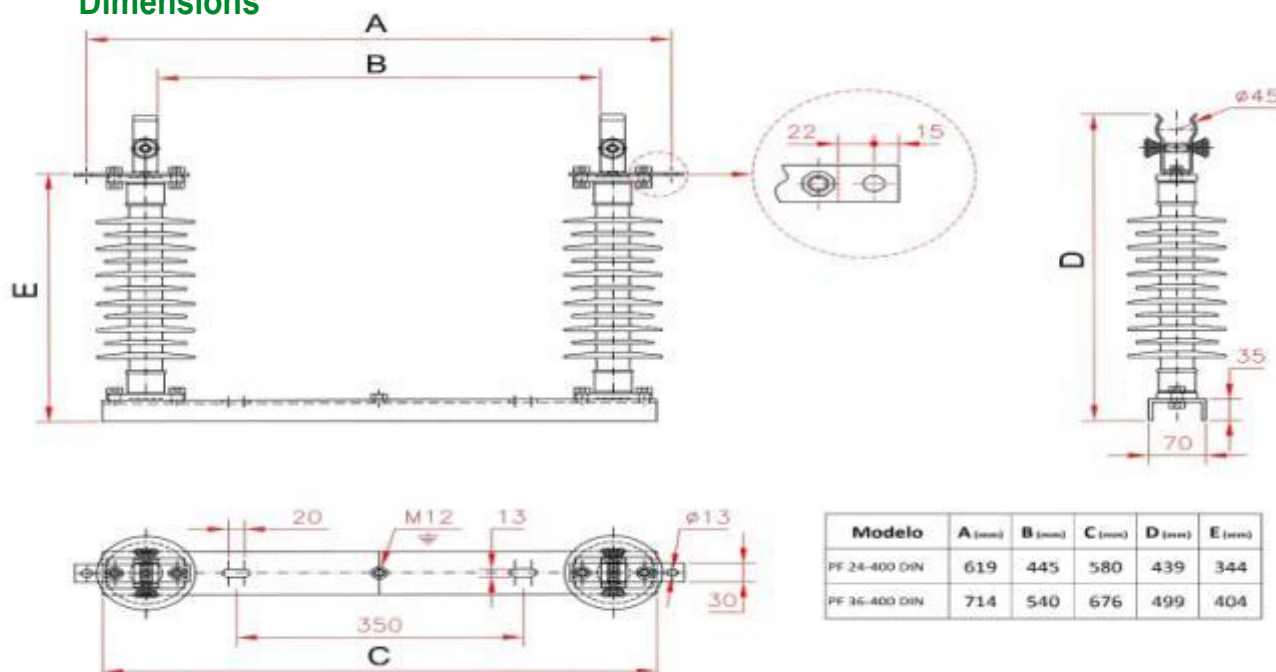

S.A. DE ELECTRIFICACIONES Y SUMINISTROS

Sede social: Calle Fontanella, 14, pral. 2ª
08010 Barcelona (España)
Tel. +34 933 018 700 • Fax. +34 933 020 010
E-mail: sades@sades.es • www.sades.es

Producción: Calle Santa Anna, 103 B, Polígono La Clota
08290 Cerdanyola del Vallès (España)
Tel. +34 935 920 594 • Fax +34 936 916 204
E-mail: aparellaje@sades.es • www.sades.es

Version 1/15